

Type SRA

FUNCTION

- 14 - (2) DPDT Mechanical Switch  
up to 10 amps @ 125/250 VAC  
up to 0.5 amps @ 125 VDC
- 16 - (2) SPDT Mechanical Switch  
up to 10 amps @ 125/250 VAC  
up to 0.5 amps @ 125 VDC
- 17 - (2) SPDT Gold Contact Mechanical Switch  
up to 1 amp @ 125 VAC  
up to 0.5 amps @ 30VDC
- 25 - (2) SPDT Reed Switch  
Max Current: 3 Amps  
Max Power: 100 Watts/VA
- 40 - (2) SPST or SPDT Reed Switch  
0.15 Amps @ 125VAC/30VDC
- 42 - (2) V3 Style Proximity Sensor  
Op Voltages (sensor dependent) 10 to 60VDC  
10 to 250VAC  
Op Current (sensor dependent) 2 to 400mA
- 43 - (2) Non V3 Style Proximity Sensor  
Op Voltages (sensor dependent) 10 to 60VDC  
10 to 250VAC  
Op Current (sensor dependent) 2 to 400mA
- 52 - (3 or 4) V3 Style Proximity Sensor  
Op Voltages (sensor dependent) 10 to 60VDC  
10 to 250VAC  
Op Current (sensor dependent) 2 to 400mA
- 53 - (3 or 4) Non V3 Style Proximity Sensor  
Op Voltages (sensor dependent) 10 to 60VDC  
10 to 250VAC  
Op Current (sensor dependent) 2 to 400mA
- 55 - (3 or 4) SPDT Mechanical Switch  
up to 11 amps @ 125/250 VAC  
up to 0.5 amps @ 125 VDC
- 56 - (3 or 4) SPDT Gold Contact Mechanical Switch  
up to 1 amp @ 125 VAC  
up to 0.5 amps @ 30VDC
- 58 - (3 or 4) SPDT Reed Switch  
Max Current: 3 Amps  
Max Power: 100 Watts/VA
- 59 - (3 or 4) SPST or SPDT Reed Switch  
0.15 Amps @ 125VAC/30VDC
- 70 - POSITION TRANSMITTER  
4-20mA @ 10 - 40 VDC  
monitor may include up to 2 additional switch/sensors from functions 16, 17, 25, 40, 42 or 43

ENCLOSURE

9 - Aluminium Cover & Housing

CONDUIT

- 5 - (2) M20 x 1.5
- 8 - (1) 3/4" & (1) 1/2" NPT
- B - (2) 1/2" NPT
- D - (2) M25 x 1.5
- E - (1) M25 & (1) M20

OUTPUT DRIVE

- L - 15mm NAMUR Output
- M - 25mm NAMUR Output
- S - 2 Pin Drive


INDICATOR

- R - RED CLOSED / GREEN OPEN (ABS material of construction)
- B - BLUE CLOSED / WHITE OPEN (ABS material of construction)
- E - RED CLOSED / YELLOW OPEN (ABS material of construction)
- W - RED CLOSED / WHITE OPEN (ABS material of construction)
- Y - NAVY BLUE CLOSED / YELLOW OPEN (ABS material of construction)
- O - NO VISUAL INDICATOR

FEATURE

- IXX - Feature Designator  
See Note 1 below

Part Number Compilation:

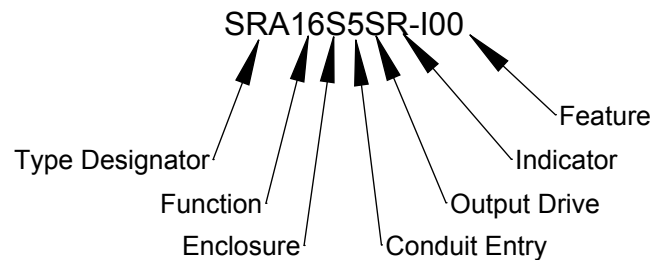

NOTE 1:

The exact detail of switches/sensors/transmitters fitted in the monitor is not fully specified by the basic part number. The 'feature designator' provides a mechanism for cross-referencing to a centralised log establish the make and model of parts fitted in a given unit.

FURTHER NOTES:

The maximum permitted power that can be dissipated within a monitor is specified on drawing A160189 and the electrical characteristics and ratings of the components fitted must not allow this value to be exceeded.

This private & confidential drawing is the property of Imtex Controls Limited, Tonbridge, UK and cannot be copied or reproduced without the express written permission of the Company.

REV	DRAWN	DATE	CHK'D	ECO
	PT	22.6.12		12-1883

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
SURFACE FINISH:  
TOLERANCES:  
LINEAR:  
ANGULAR:

TITLE:

Type SRA - Exd Master Model Description

**Imtex Controls Limited**  
Unit 5A, Valley Industries, Hadlow Road  
Tonbridge, Kent, TN11 0AH. United Kingdom  
Tel:+44(0)1732-850360 Fax:+44(0)1732-852133  
[Website: www.imtex-controls.com](http://www.imtex-controls.com)

DEBUR AND  
BREAK SHARP  
EDGES

MATERIAL:  
WEIGHT(g):

DWG NO.

**A190280**

SCALE:1:1

SHEET 1 OF 1

REV  
STATUS  
S