
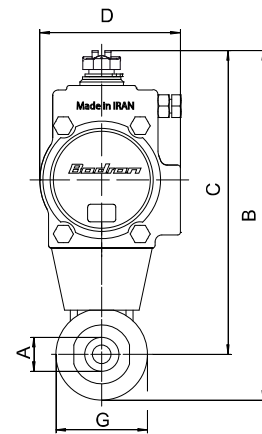


2 way ball valve, AISI 316L, F/F threaded, fire safe BS 6755, antistatic device, high pressure, with pneumatic actuator. For hydraulic oil, emulsion, gas. For particular applications, refer to sales department.

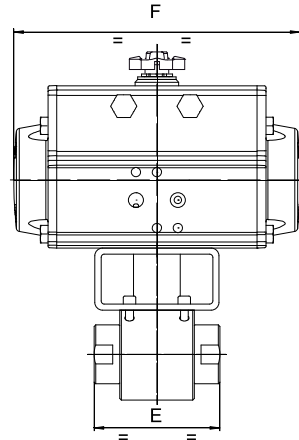

### Art. 8P022700

Valve With Double Acting Actuator

| PN     | 500   | 500  | 400   | 350   | 350    | 350    | 350    |
|--------|-------|------|-------|-------|--------|--------|--------|
| DN - A | 3/8"  | 1/2" | 3/4"  | 1"    | 1"1/4  | 1"1/2  | 2"     |
| B      | 195   | 217  | 244   | 253   | 295    | 328    | 391    |
| C      | 168   | 182  | 207   | 211   | 245    | 271    | 329    |
| D      | 71    | 81   | 95    | 95    | 123    | 123    | 137    |
| E      | 72    | 81   | 98    | 106   | 127    | 135    | 160    |
| F      | 141   | 164  | 210   | 210   | 275    | 275    | 333    |
| G      | 54    | 59   | 74    | 83    | 99     | 114    | 123    |
| ACT.   | DA 52 | DA63 | DA 75 | DA 75 | DA 100 | DA 100 | DA 115 |
| RI     | 4220  | 4221 | 4222  | 4222  | 4482   | 4223   | 4224   |

### Art. 8P022800

Valve With Spring Return Actuator

| PN     | 500   | 500   | 400    | 350    | 350    | 350    | 350    |
|--------|-------|-------|--------|--------|--------|--------|--------|
| DN - A | 3/8"  | 1/2"  | 3/4"   | 1"     | 1"1/4  | 1"1/2  | 2"     |
| B      | 224   | 230   | 271    | 280    | 329    | 362    | 426    |
| C      | 197   | 200   | 234    | 238    | 279    | 305    | 364    |
| D      | 95    | 95    | 123    | 123    | 137    | 137    | 164    |
| E      | 72    | 81    | 98     | 106    | 127    | 135    | 160    |
| F      | 210   | 210   | 275    | 275    | 333    | 333    | 435    |
| G      | 54    | 59    | 74     | 83     | 99     | 114    | 123    |
| ACT.   | SR 75 | SR 75 | SR 100 | SR 100 | SR 115 | SR 115 | SR 140 |
| RI     | 4225  | 4225  | 4222   | 4222   | 4226   | 4227   | 4228   |

Actuator air supply pressure minimum 6 Bar