
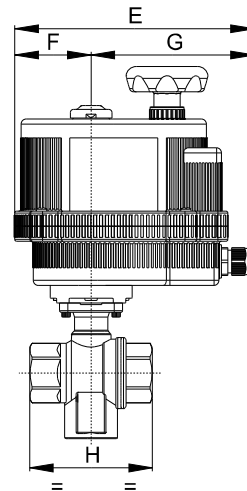


Art. 8E044 (T)*** con attuatore rotazione 0°÷90° - with actuator rotation 0°÷90°

Diverter brass CW617N ball valve [art. 3110 (T)], full bore, female threaded, "T" port, with electric actuator series 85. (Self-Extinguish Technopolymer Enclosure)

Art. 8E087 (L)*** con attuatore rotazione 0°÷180° - with actuator rotation 0°÷180°

Diverter brass CW617N ball valve [art. 3210 (L)], full bore, female threaded, "L" port, with electric actuator series 85. (Self-Extinguish Technopolymer Enclosure)

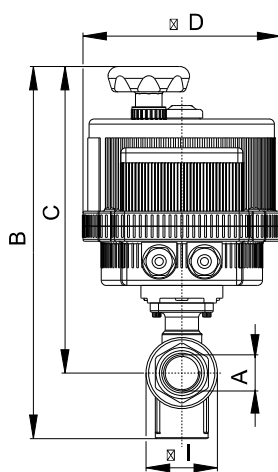

Art. 8E044 (T)* - 8E087 (L)*****

PN	25	25	25	16	16	10	10	10
DN - A	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	197	197	207	224	234	246	311	328
C	171	171	173	184	187	191	250	255
D	123	123	123	123	123	123	157	157
E	164	164	164	164	164	164	191	191
F	43	43	43	43	43	43	61	61
G	121	121	121	121	121	121	130	130
H	52	52	64	74	89	100	110	130
I	28	28	35	43	53	63	77	93
ACT.	VB 015	VB 015	VB 015	VB 015	VB 015	VB 015	VB 030	VB 030
RI	4017	4017	4017	4017	4017	4017	4016	4016

*** VOLTAGE SUPPLY ORDER CODE		
12V AC/DC + 001	24V AC/DC + 002	100-240V AC + 004